




Door Model

Hale Pet Door™ Door Model

The Hale Pet Door™ "Door Model" is a popular model. It's self-framing and self-supporting design makes it easy to install in almost any door location. No need to frame out the door. Just cut the correct size rough opening in the door, slip the inside and outside frames together and attach with provided screws. Instructions for installation included in the box or on our website.

We offer technical support when needed and professional installation is available in many locations nationwide.

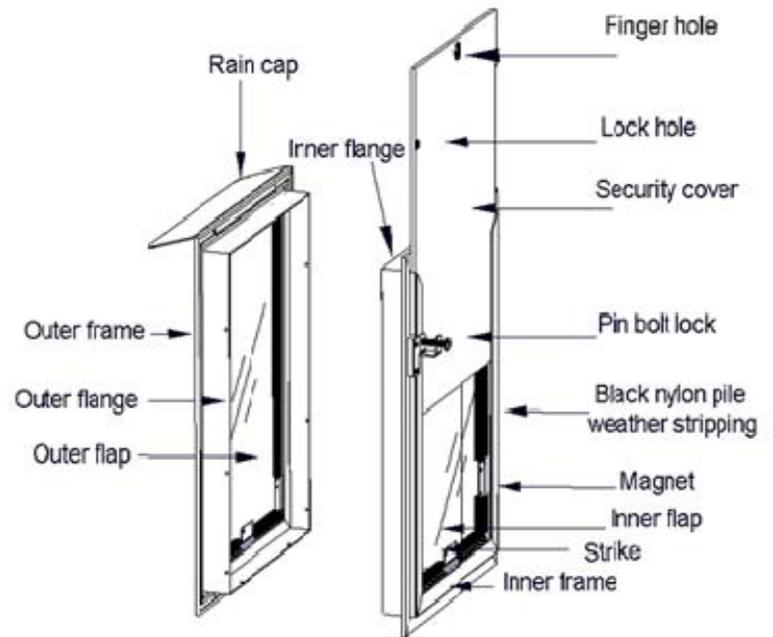

SPECIFICATIONS:

Flaps: Double flaps (one flap on each door surface) made of flexible 3/16" clear PVC vinyl. Also available in black and white.

Inner Frame: Inner frame made of two separate metal extrusions. Three sides entrap the security cover. Both metals are .063" wall thickness.

Outer Frame: Extruded 6063-T5 aluminum with .063" wall thickness. Designed to sleeve into the inside frame.

Flange: The outer frame flange is .070" smaller than the inner frame flange to allow the frame to sleeve together.

Alnico5 Magnets: A 1/4" rod magnet 1 1/2" long made from an aluminum, nickel and cobalt alloy known for its strength and durability. Door size determines number of magnets.

Strikes: Made of ferrous stainless steel. 1 1/2" long, 3/4" tall and 1/32" thick. U shaped with interior prongs, when squeezed onto the vinyl flap, the barbed prongs hold firmly.

Weather stripping: Flap is surrounded by 1/2" nylon pile for maximum insulation. Nylon is woven into a backing 9/32" wide and 1/32" thick.

Security Cover: 1/4" thick King Starboard® or 3/16" Lexan® polycarbonate sheet. Extremely shock and impact resistant. Has a 3/8" diameter locking hole and a 3/4" diameter handle hole.

Pin Lock: A 1/4" diameter positive action steel pin encased with 5/32" thick fabricated plated steel.

Gap: Standard range between door frames is from 1 9/32" to 2". A dimension larger than 2" would normally be considered a wall unit. Can be factory modified to collapse to as small as 3/4" gap.

Raincap: An optional awning like attachment that hooks to the outside frame for use in diverting water and preventing it from entering the pet door from above.

OPTIONS:

Flaps: *Training flap*—use for a limited time when pet is timid and getting used to the pet door. *Polar flap*—use in extremely cold climates or where a softer flap is desired. *Single flap*—designed for installation through interior doors where added insulating factor is not needed.

Frame Colors: Available in four color choices—Brushed aluminum, dark bronze, white and Arizona beige—can be mixed to coordinate with interior and exterior colors of the home

Security Cover Load: Standard top loading. Also available in side loading model if there is an obstruction above door.

Security Cover: Can be installed outside, inside, or with dual security covers. Available in translucent gray Lexan or four opaque Starboard colors to coordinate with our frame colors.

Sizes: 11 standard sizes available from small to giant. Custom sizing also available.

OUTSTANDING FEATURES:

- Self-supporting, self-framing
- Energy efficient
- Easy to clean

APPLICATIONS:

Designed to be installed through almost any door.

- Wood doors
- Metal doors
- Multi lite French doors
- Hollow core doors
- Raised panel doors

Can be used through interior or exterior doors