





*Hale Standard Panel™ Model*

# Hale Pet Door™ Hale Standard Panel™ Model

The "Hale Standard Panel™ Model" is designed to fit into the door track of sliding glass doors. It is anchored directly into the patio door frame making for a very sturdy, permanent installation. The standard panel takes more of the people passage than our Omni model but it locks directly onto the leading edge of the sliding door with a patio door style lock. While this model is manufactured to your measurements, height adjustment is accomplished with a hack saw. Instructions for installation included in the box or on our website. We offer technical support when needed and professional installation is available in many locations nationwide.

STANDARD PANEL MODEL

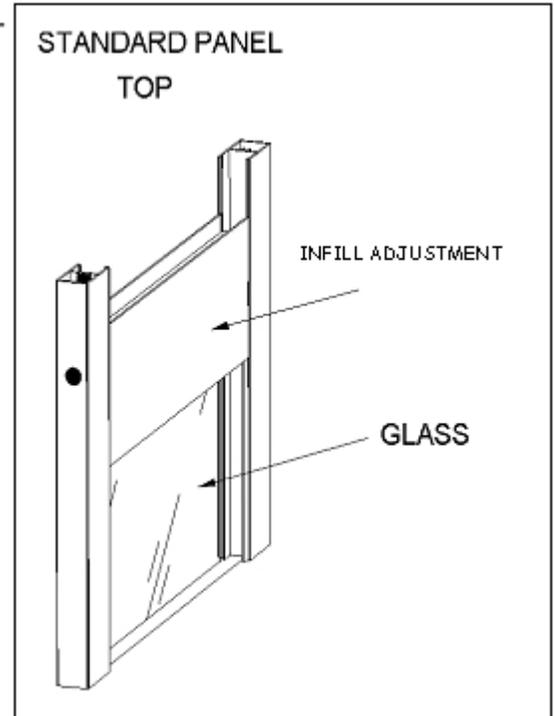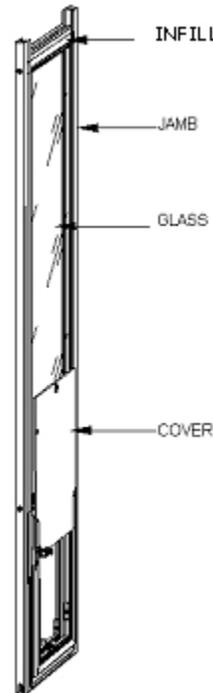

## PET DOOR SPECIFICATIONS:

**Flaps:** Double flaps (one flap on each frame) made of flexible 3/16" clear PVC vinyl. Also available in black and white.

**Inner Frame:** Inner frame made of two separate metal extrusions. Three sides entrap the security cover. Both metals are .063" wall thickness.

**Outer Frame:** Extruded 6063-T5 aluminum with .063" wall thickness. Designed to sleeve into the inside frame.

**Alnico5 Magnets:** A 1/4" rod magnet 1 1/2" long made from an aluminum, nickel and cobalt alloy known for strength & durability. Door size determines number of magnets.

**Strikes:** Made of ferrous stainless steel. 1 1/2" long, 3/8" tall and 1/32" thick. U shaped with interior prongs, when squeezed onto the vinyl flap, the barbed prongs hold firmly.

**Weather stripping:** Flap is surrounded by 1/2" black nylon pile for maximum insulation. Nylon is woven into a backing 9/32" wide and 1/32" thick.

**Security Cover:** 1/4" thick King Starboard® polymer or 3/16" Lexan® polycarbonate sheet. Extremely shock and impact resistant. Has a 3/8" diameter locking hole and a 3/4" diameter handle hole.

**Pin Lock:** A 1/8" diameter positive action steel pin encased with 5/32" thick fabricated plated steel.


## OPTIONS:

**Flaps:** *Training flap*—use for a limited time when pet is timid and getting used to the pet door. Can also choose one of our two opaque colored flaps if darkness or privacy is an issue.

**Frame Colors:** Available in four color choices—Brushed aluminum, dark bronze, white and Arizona beige

**Security Cover:** Can be installed outside, inside, or with dual security covers. Available in translucent gray Lexan or four opaque Starboard colors to coordinate with our frame colors.

**Sizes:** 11 standard sizes from small to giant. Custom sizing also available.

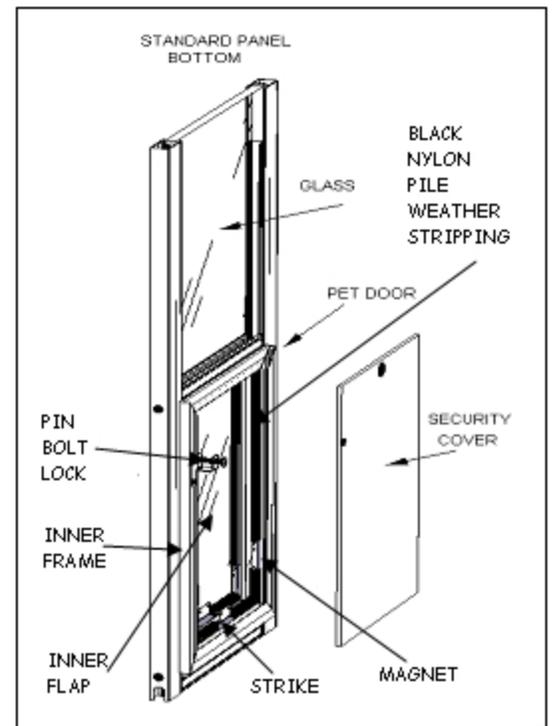

## PANEL SPECIFICATIONS:

**Jamb:** Two heavy extruded pieces of aluminum extending the entire length of panel on each side. 1/16" walled 1 5/8" x 7/8". Top of jamb members are cut at installation to allow panel to fit door opening. Screws are set into jamb through door channel at top, outer edge and/or bottom of panel.

**Locking Strip:** Separate metal strip to be attached to leading edge of sliding glass door for panel door lock to secure into.

**Panel Door Lock:** Patio style door lock on panel that secures into the locking strip.

**Infill Adjustment:** Two pieces of 1/16" aluminum extrusion, 3 1/2" tall with 1/2" flange on inner side. Fastened together at flanges with two 1/8" x 3/16" pan head screws. They are raised to cover the open area once the panel is installed and held in place by tightening 3/16" x 3" pan head screws located on outside of the panel.

**Glass:** Double pane insulated tempered glass.

**Vinyl Weather stripping:** Unit also comes with extra length of 1 7/8" x 1/16" black vinyl weather stripping to attach to back edge of your patio door to prevent air leakage.