






Vertical Hale Optiview Window™ Model

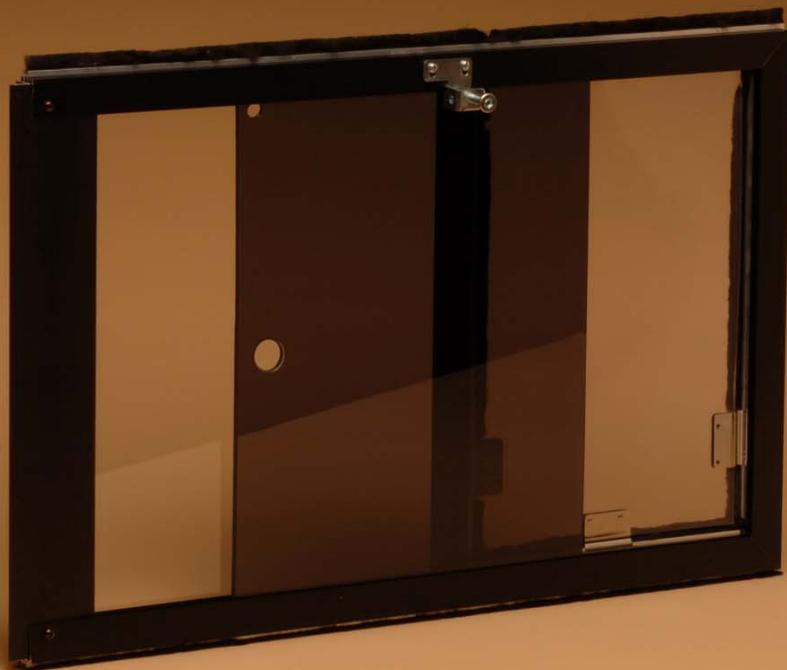

Vertical Hale Optiview Window™ with Cover

The "Vertical Hale OptiView Window™ Model" has a horizontal design to allow it to fit into almost any window that slides open and closed vertically, whether double or single hung. It has been engineered to be easily installed and has a very light weight frame. This model features the maximum visible glass area of our window models and is available in single or double pane/flap versions. Each window is manufactured to your specific measurements so no cutting is required and the adjustable end cap allows for precise fitting. Instructions for installation included in the box or on our website. We offer technical support when needed and professional installation is available in many locations nationwide.

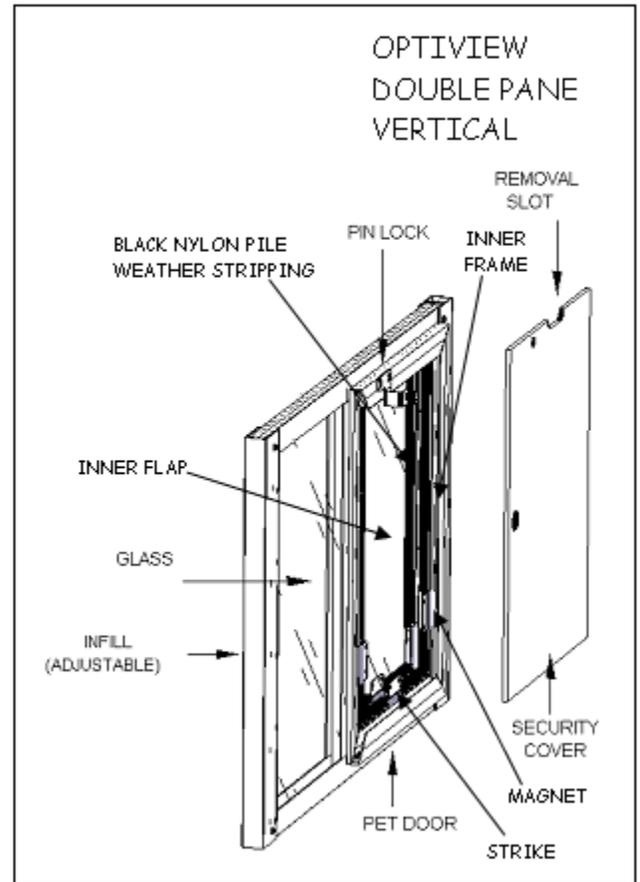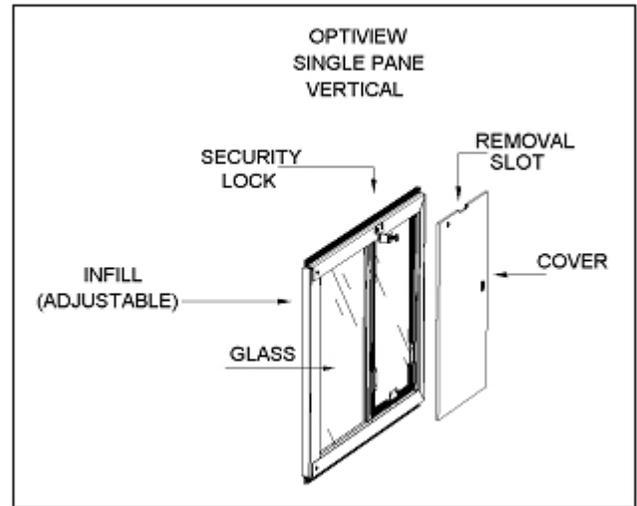

PET DOOR SPECIFICATIONS:

Flaps: Double flaps (one flap on each frame) made of flexible 3/16" clear PVC vinyl. Single flap only on single pane model.

Inner Frame: Inner frame made of two separate metal extrusions. Three sides entrap the security cover. Both metals are .063" wall thickness.

Outer Frame: Extruded 6063-T5 aluminum with .063" wall thickness. Designed to sleeve into the inside frame.

Alnico5 Magnets: A 3/4" rod magnet 1 1/2" long made from an aluminum, nickel and cobalt alloy known for strength & durability. Door size determines number of magnets.

Strikes: Made of ferrous stainless steel. 1 1/2" long, 3/4" tall and 1/32" thick. U shaped with interior prongs, when squeezed onto the vinyl flap, the barbed prongs hold firmly.

Weather stripping: Flap is surrounded by 1/2" black nylon pile for maximum insulation. Nylon is woven into a backing 9/32" wide and 1/32" thick.

Security Cover: 3/16" thick GE Lexan® polycarbonate sheet. Extremely shock and impact resistant. Has a 3/8" diameter locking hole and a 3/4" diameter handle hole.

Removal Slot: Groove cut into security cover to enable removal past other window hardware.

Pin Lock: A 1/4" diameter positive action steel pin encased with 5/32" thick fabricated plated steel.

WINDOW SPECIFICATIONS:

Frame: Single pane model designed to fit into a window track 11/16" or wider. Double pane model designed to fit window tracks 7/8" or wider.

Adjustable Infill Endcap: Small metal strip on window end of unit is adjustable up to 1" for proper sizing in window frame.

Glass: Double pane insulated tempered glass or Single pane 3/16" tempered glass.

Pile Weather stripping: Top and bottom edges of window unit contain dense 5/16" gray nylon pile weather stripping. Nylon is woven into a .270 wide and 1/32" thick nylon backing.

Vinyl Weather stripping: Unit also comes with extra length of 1 7/8" x 1/16" black vinyl weather stripping to attach to back edge of your window to prevent air leakage.

OPTIONS:

Flaps: *Training flap*—use for a limited time when pet is timid and getting used to the pet door. *Polar flap*—use in extremely cold climates or where a softer flap is desired.

Flap/Glass: Double flaps and double pane insulated glass in double model. Single flap and single 3/16" tempered glass pane in single model.

Handing: From the inside looking out, which side the pet door is on. XO = door/window or OX = window/door

Frame Colors: Available in four color choices—Brushed aluminum, dark bronze, white and Arizona beige

Sizes: 11 standard sizes from small to giant. Custom sizing also available. Sizes available are restricted by size of home's window opening.